


Overlap Geotextile Fabric
6" and fasten at 2' intervals

5' minimum steel post
at 8' max. spacing

Wire Mesh reinforcement, Std.
field fence, Min. 30" high,
Max. Mesh spacing 6" and
Min. 14 1/2 gauge wire.

Geotextile Fabric, 48" wide—
overlap fabric 6" and fasten
at 2 intervals.

Fabric anchorage trench,
backfill trench with
tamped natural soil

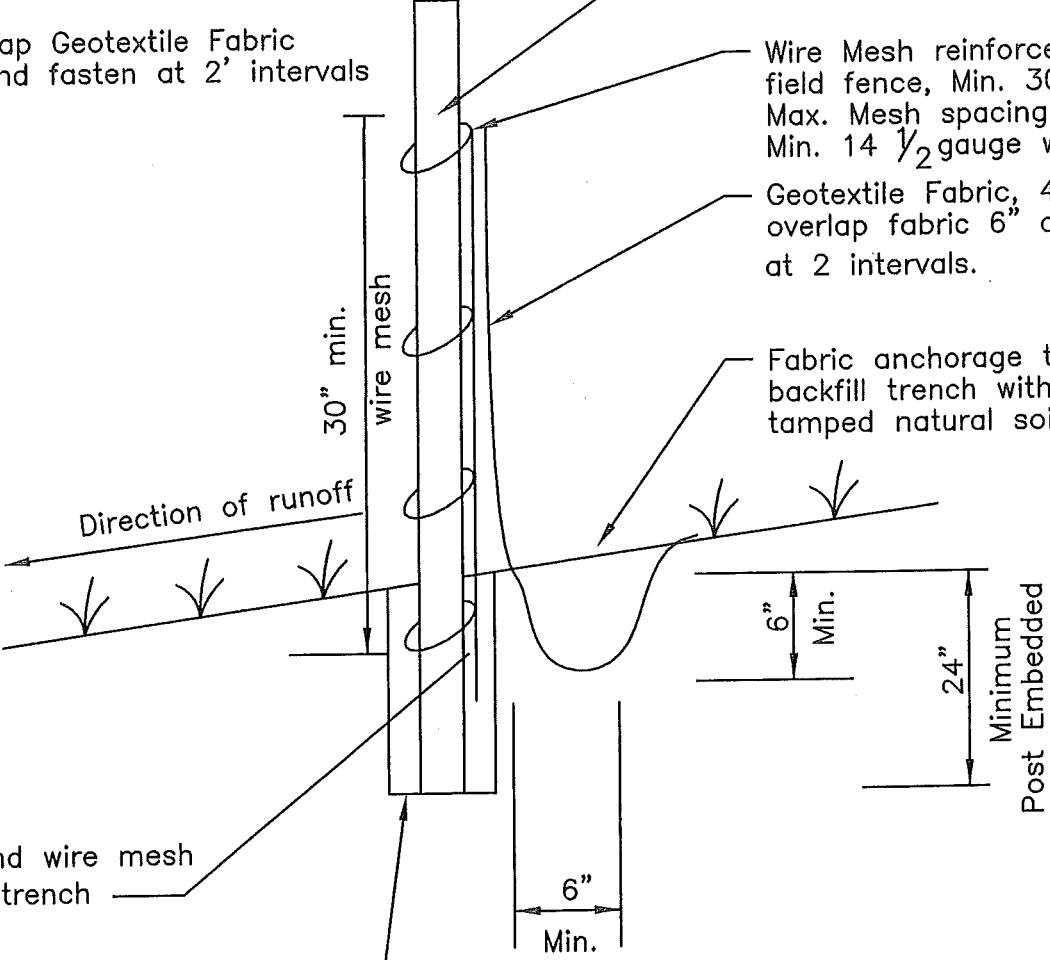

Extend wire mesh
into trench

Support post anchorage
in-situ soil

- NOTE:
1. Attach fabric to wire mesh and support posts with rings or wire ties.
 2. See Mn/DOT memorandum 05-04-ENV-02.



STANDARD DETAILS
SILT FENCE
HEAVY DUTY

FARMINGTON, MINNESOTA

Last Revision:
Feb 2007

City Plate No.
ERO-02